+ ZOOM

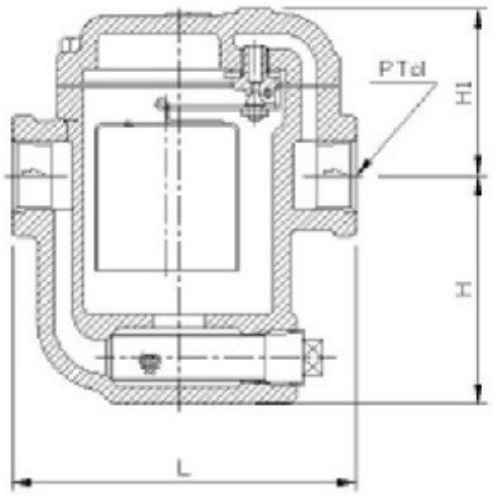

+ ZOOM

- **Structure is simple but rigid, and operation is reliable.**
- **There is no air binding because of a topdown-type bucket.**
- **Durability is excellent because main components are made of stainless steel and heat-treated.**
- **Malfunction is prevented from the foreign substances by using a built-in strainer.**
- **Maintenance and inspection is possible only by separating a lid.**

Working Pressure	Max. 8, 16 kgf/cm2
	Min. 0.35 kgf/cm2
Working Temperature	Max. 220°C
Connection	JIS B 0203 PIPE TAPER THREAD
Materials	BODY: Ductile Iron
	Trim: Stainless Steel

MODEL	SIZE	D	L	H1	H
TBK-1S	15A	PT 1/2"	127	86	149
	20A	PT 3/4"	127	86	149
	25A	PT 1"	135	89	162
	32A	PT 1-1/4"	190	170	250
	40A	PT 1-1/2"	190	170	250
	50A	PT 2 "	240	210	280