


Dimensional Data :

Spiral Wound Gaskets ASME B16.20 (for RF flanges B16.5) | Class 300

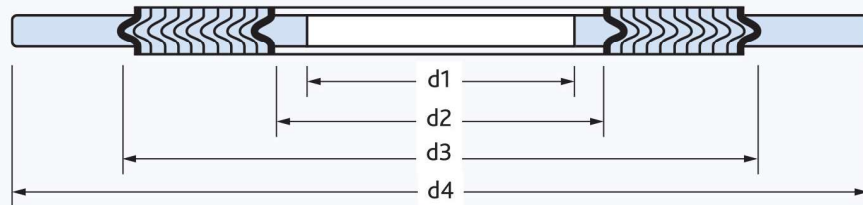

NPS	Inner Ring	Sealing Element		Outer Ring
	Inside Dia (d1)	Inside Dia (d2)	Outside Dia (d3)	Outside Dia (d4)
1/2	14.2	19.1	31.8	54.1
3/4	20.6	25.4	39.6	66.8
1	26.9	31.8	47.8	73.2
1¼	38.1	47.8	60.5	82.6
1½	44.5	54.1	69.9	95.3
2	55.6	69.9	85.9	111.3
2½	66.5	82.6	98.6	130.3
3	81	101.6	120.7	149.4
4	106.4	127	149.4	181.1
5	131.8	155.7	177.8	215.9
6	157.2	182.6	209.6	251
8	215.9	233.4	263.7	308.1
10	268.2	287.3	317.5	362
12	317.5	339.9	374.7	422.4
14	349.3	371.6	406.4	485.9
16	400.1	422.4	463.6	539.8
18	449.3	474.7	527.1	596.9
20	500.1	525.6	577.9	654.1
24	603.3	628.7	685.8	774.7

NOTES:

- All dimensions are in millimeters
- Spiral Wound gasket with Inner - and Outer ring
- d1 = Inside diameter Inner ring.
- d2 = Inside diameter sealing element when no Inner ring is used.
- d3 = Outside diameter of sealing element.
- d4 = Outside diameter of Outer ring.
- Thickness of inner and outer ring: 2.97 mm - 3.33 mm.
- Thickness sealing element: 4.45 mm.
- Tolerance Outside diameter for NPS 1/2 through NPS 8 is ± 0.8 mm; for NPS 10 through NPS 24 tolerance is ± 1.5 mm - 0.8 mm.
- There are no class 400 flanges NPS 1/2 thru NPS 3 (use Class 600), class 900 flanges NPS 1/2 thru NPS 2½ (use Class 1500), or class 2500 flanges NPS 14 or larger.