


Steam Trap

TBK-1F

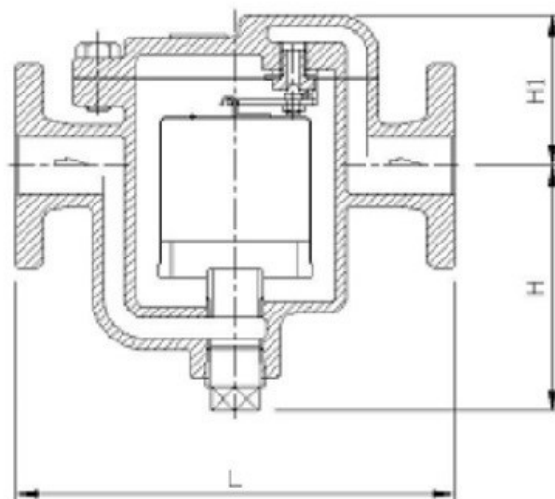

- Structure is simple but rigid, and operation is reliable.
- There is no air binding because of a topdown-type bucket.
- Durability is excellent because main components are made of stainless steel and heat-treated.
- Malfunction is prevented from the foreign substances by using a built-in strainer.
- Maintenance and inspection is possible only by separating a lid.

Working Pressure	Max. 8, 16 kgf/cm ²
	Min. 0.35 kgf/cm ²
Working Temperature	Max. 220°C
Connection	JIS B 2210 FLANGE
Materials	BODY: Ductile Iron
	Trim: Stainless Steel

MODEL	SIZE	D	L	H1	H
TBK-1F	32A	32	250	170	250
	40A	40	250	170	250
	50A	50	290	210	280