


Steam Trap

TFT-1S

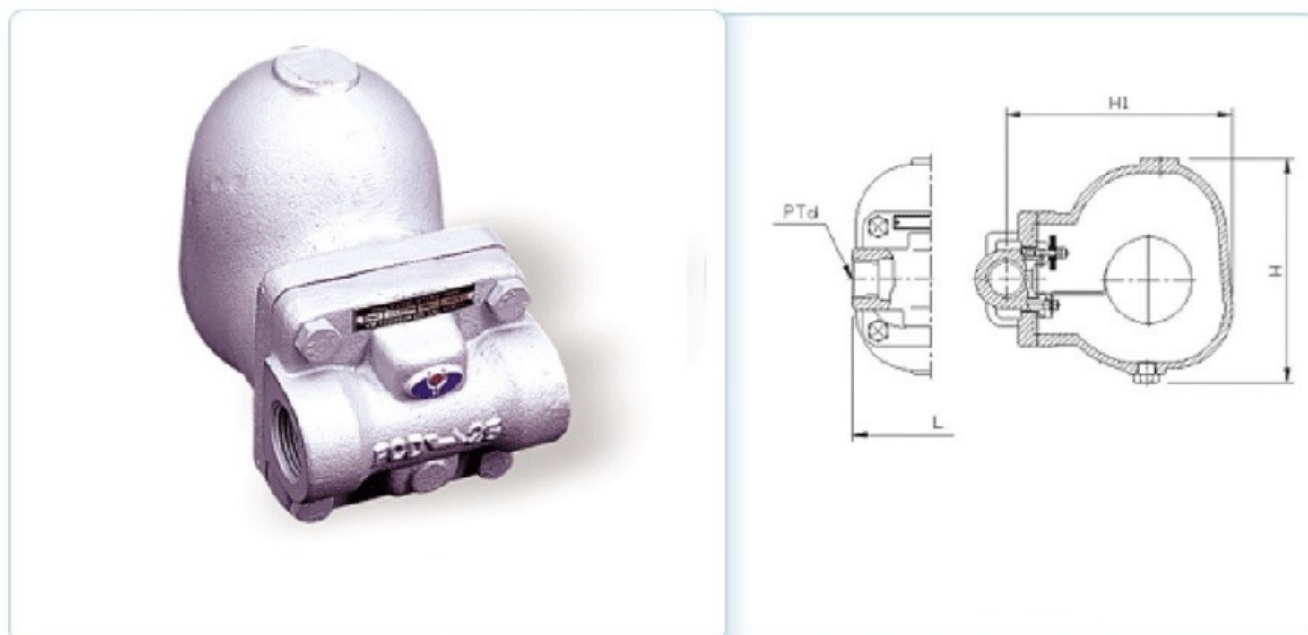

- A bimetal-type air band is employed to prevent air banding Proper to high temperature.
- Broadly available for various steam equipments, such as a heat exchanger, a drier, a unit heater, etc. because of a mechanical structure using buoyancy. Contributive to energy saving because of high preciseness.
- Simple structure, such that maintenance and inspection is possible only by separating a lid.
- Stable operation regardless of changes in the amount of condensate generation.

Working Pressure	Max. 4.5, 10, 14 kgf/cm ²
	Min. 0.35 kgf/cm ²
Working Temperature	Max. 220°C
Connection	JIS B 0203 PIPE TAPER THREAD
Materials	BODY: Ductile Iron
	Trim: Stainless Steel

MODEL	SIZE	D	L	H1	H
TFT-1S	15A	PT 1/2"	120	120	155
	20A	PT 3/4"	120	120	155
	25A	PT 1"	120	185	190
	32A	PT 1-1/4"	270	240	295
	40A	PT 1-1/2"	270	240	295
	50A	PT 2 "	300	260	310