


# RD-32N, 32FN, 34FN Type Pressure Reducing Valve (for Water or Hot Water)

for Building and Factory Equipments etc. Direct operation, general-purpose valves


(bronze body, medium capacity)

Bronze valves meeting the demand of the time.

Designed based on our technology for making quality pressure reducing valves, which are highly evaluated by our customers, these valves are more reliable, easier to control and use, and particularly, they do not allow rust in the entire piping line, including pipe joints. Using these pipes, you do not need to worry about the occurrence of the red water (rusty water). Ideal for applications in building, house, factory, and boiler and water supply equipments.




Screw Type




Flange Type

## CONSTRUCTION


RD-32N Type

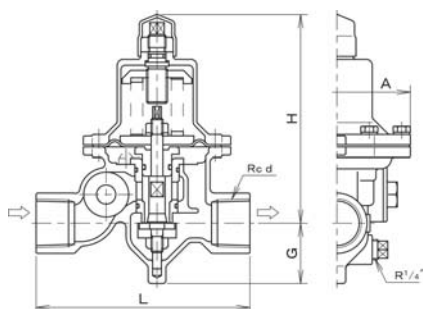

RD-32FN Type

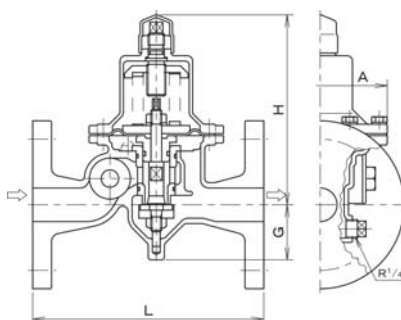

RD-34FN Type



## FEATURES

- Bronze body prevents occurrence of rusty water.
- Low noise design.
- 50% smaller, lighter than traditional cast iron products.
- No water leakage even if the diaphragm is broken.
- Flexible installation (except that the strainer cap face upwardly).
- Strainer embedded (40 meshes for nominal diameter less than size 50mm).

## SPECIFICATIONS

Model name	RD-32N L/H	RD-32FN L/H	RD-34FN L/H
Code name	RD32N-F □	RD32FN-F □	RD34FN-F □
	※ L (low press.) or H (high press.) for adjustable secondary pressure is required in □		
Size	15~50(½"~2")	25~50(1"~2")	65~100(2½"~4")
End connection	Screwed JIS Rc	Flanged JIS 16KFF	
Applicable primary pressure	Max. 1.6MPa		
Applicable fluid	Water & hot water		
Applicable temperature	5~90℃		
Adjustable secondary pressure	L:0.05~0.35MPa, H:0.3~0.7MPa		
Maximum reducing rate	10:1		
Minimum pressure differential across the disc	0.05MPa		
Leakage allowance	Nil(Confirm at pressure Gauge)		
Valve body pressure test	Hydraulic 2.4MPa		
Materials	Body(Cast bronze), Trim(Cast bronze), Diaphragm & disc(Synthetic rubber) Spring case(Size 25~50mm:Cast zinc, Size 65~100mm:Cast iron)		

\* Valves with pressure gauge are also available upon your request.

## DIMENSIONS(RD-32N Type)

(mm)

Size	D	L	G	H	A	Mass(kg)
15(1/2")	1/2"	125	41	140	100	2.2
20(3/4")	3/4"	130	41	140	100	2.3
25(1")	1"	145	41	141	100	2.6
32(1 1/4")	1 1/4"	175	50	187	116	4.9
40(1 1/2")	1 1/2"	180	50	187	116	5.1
50(2")	2"	205	50	206	142	7.5

## DIMENSIONS(RD-32FN,34FN Type)

(mm)

Size	L	G	H	A	Mass(kg)
25(1")	170	41	141	100	5.3
32(1 1/4")	190	50	187	116	8.3
40(1 1/2")	190	50	187	116	8.6
50(2")	230	50	206	142	12
65(2 1/2")	215	70	280	162	22
80(3")	260	70	285	162	28.5
100(4")	300	78	345	201	39

Flange code JIS 16KFF