



KUNKLE DATA SUPPLEMENT SAFETY AND RELIEF PRODUCTS

Data Supplement for Kunkle Safety and Relief Products



CONTENTS

| | |
|--|------|
| ASME Codes | 2-3 |
| Seat Tightness Performance Standards | 4 |
| Valve Selection Guide | 5-7 |
| Sizing and Selection | 8-11 |
| General Information | 12 |

All valve dimensions are for reference only.

ASME CODES

The ASME (American Society of Mechanical Engineers) boiler and pressure vessel code requirements for overpressure protection as they relate to Kunkle products are as follows:

ASME Section I

This code applies to boilers where steam or other vapor is generated at a pressure greater than 15 psig [1.0 barg], high temperature water boilers intended for operation at pressures exceeding 160 psig [11.03 barg] and/or temperatures exceeding 250°F [121°C] and liquid phase thermal fluid heaters.

Boiler Pressure Accumulation

No more than 6% above the highest pressure at which any valve is set, or no more than 6% above MAWP.

Set Pressure

The set pressure of a one-valve installation cannot be higher than the MAWP. The set pressure of the second or other valves in a multiple valve installation can be up to 3% above the MAWP. The complete range of valve settings for multiple valve installations cannot be greater than 10% of the highest set pressure. For high temperature water boilers, this 10% range may be exceeded.

ASME Section IV

This code applies to steam boilers operating at pressures not greater than 15 psig [1.0 barg] and hot water heating boilers operating at pressures not greater than 160 psig [11.03 barg] and/or temperatures not greater than 250°F [121°C].

Steam Boilers

Valve capacity must be selected to prevent the boiler pressure from rising more than 5 psig [0.35 barg] above the MAWP.

Hot Water Boilers

Safety valve must be set to relieve at a pressure not greater than the MAWP of the boiler. If more than one safety valve is used, the secondary valve(s) may be set up to 6 psig [0.41 barg] above the MAWP for boilers with MAWPs up to and including 60 psig [4.13 barg], and 5% for boilers with MAWPs greater than 60 psig [4.13 barg]. Capacity must be selected to prevent the pressure from rising more than 10% above the MAWP if one valve is used or 10% above the set pressure of the highest set valve if more than one valve is used.

Tanks/Heat Exchangers High Temperature Water-to-Water Heat Exchangers

Valve(s) must be set at a pressure not greater than the MAWP and with sufficient capacity to prevent the pressure from increasing more than 10% above the MAWP.

Steam to Hot Water Supply

Valve must be at least 1" [25 mm] diameter with set pressure not greater than MAWP of the tank.

High Temperature Water to Steam Heat Exchanger

Valve must be set at a pressure not greater than 15 psig [1.0 barg] and with sufficient capacity to prevent the pressure from rising more than 5 psig [0.35 barg] above the MAWP.

ASME Section VIII

This code applies to unfired pressure vessels with an inside diameter larger than 6 inches [130 mm] and designed for use above 15 psig [1.0 barg]. Valve(s) must prevent the pressure from rising more than 10% or 3 psig [0.21 barg], whichever is greater, above the MAWP. For a single valve installation, the set pressure may not be greater than the MAWP. For multiple valve installations, the first valve cannot be set higher than the MAWP, but the other valves can be set up to 5% above the MAWP. The pressure rise for multiple valve installations can be 16% or 4 psig [0.27 barg], whichever is greater. When the vessel is exposed to an external heat source, such as fire, the pressure rise can be 21% above the MAWP.

NOTE

Information stated is for reference only. User should always refer to the current revision of the ASME BPVC.

KUNKLE SAFETY AND RELIEF PRODUCTS


DATA SUPPLEMENT

ASME CODE REQUIREMENTS

National Board

Kunkle valves are manufactured at facilities that meet the manufacturing requirements of the ASME Sections I, IV, and VIII codes for pressure relief valves. Valves that have the relief capacity certified by the National Board of Boiler and Pressure Vessel Inspectors bear the following code symbol stamp on the nameplate and the letters NB. Most Kunkle valves have NB certified capacities.

Code Stamps

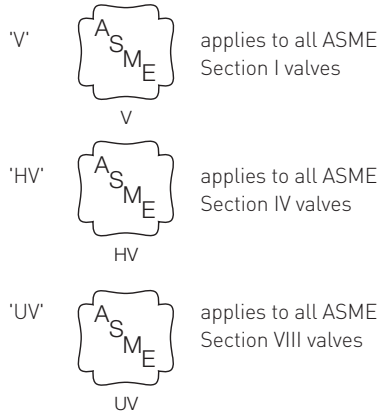

NOTE

Information stated above is based on latest Code at time of publication.

POWER BOILER - SECTION I - CODE 'V'

| Set Pressure | | Set Pressure Tolerance | Minimum Blowdown ² | Overpressure ¹ |
|--------------|-----------------|------------------------|-------------------------------|---------------------------|
| psig | [barg] | | | |
| 15 - 100 | [1.03 - 6.90] | | 2 psig [0.14 barg] min. | |
| 101+ | [6.96+] | | 2% | |
| 15 - 70 | [1.03 - 4.83] | ±2 psig [±0.14 barg] | | |
| 71 - 300 | [4.90 - 20.69] | ±3 % | | |
| 301 - 1000 | [20.95 - 68.96] | ±10 psig [±0.69 barg] | | |
| 1001 and up | [69.03 and up] | ±1% | | |

NOTES

- Overpressure would be 2 psig [0.14 barg] for pressures between 15 - 66 psig [1.03 - 4.55 barg]. Pressures above 66 psig [4.55 barg] would have an overpressure of 3%. Valves marked for liquid service have allowable overpressure of 10% or 3 psig (whichever is greater).
- Maximum blowdown is 10% for "Special Application Section I" valves.

HEATING BOILER - SECTION IV - CODE 'HV'

| | Set Pressure | | Set Pressure Tolerance | Blowdown | Overpressure |
|---------------|--------------|---------------|------------------------|-------------------------------|--------------------|
| | psig | [barg] | | | |
| 15 psig Steam | 15 | [1.0] | ±2 psig [±0.14 barg] | 2 - 4 psig [0.14 - 0.28 barg] | 5 psig [0.34 barg] |
| Hot Water | 15 - 60 | [1.0 - 4.14] | ±3 psig [±0.21 barg] | N/A | 10% |
| Hot Water | 61 - 160 | [4.20 - 11.0] | ±5% | N/A | 10% |

UNFIRED PRESSURE VESSEL - SECTION VIII - CODE 'UV'

| Set Pressure | | Set Pressure Tolerance | Blowdown | Overpressure |
|--------------|--------------------|------------------------|----------|--------------------|
| psig | [barg] | | | |
| 15 - 30 | [1.0 - 2.07 barg] | ±2 psig [±0.14 barg] | N/A | 3 psig [0.21 barg] |
| 31 - 70 | [2.14 - 4.83 barg] | ±2 psig [±0.14 barg] | N/A | 10% |
| 71 and up | [4.90 barg and up] | ±3% | N/A | 10% |

NON-CODE SET PRESSURE TOLERANCE

| Set Pressure, psig [barg] | Set Pressure Tolerance, psig [barg] |
|---|-------------------------------------|
| Below 15 psig [1.0 barg] to 10 psig [0.69 barg] | +/- 2.0 psig [± 0.14 barg] |
| Below 10 psig [0.69 barg] to 5.0 psig [0.34 barg] | +/- 1.0 psig [± 0.07 barg] |
| Below 5.0 psig [0.34 barg] | +/- 0.5 psig [± 0.03 barg] |
| Below 0.0" Hg [0.0 mb] to 10" Hg [337 mb] | +/- 1.0" Hg [± 33.7 mb] |
| Below 10" Hg [337 mb] to 20" Hg [674 mb] | +/- 2.0" Hg [± 67.4 mb] |
| Below 20" Hg [674 mb] | +/- 4.0" Hg [± 134.8 mb] |

KUNKLE SAFETY AND RELIEF PRODUCTS

DATA SUPPLEMENT

SEAT TIGHTNESS PERFORMANCE STANDARDS

KUNKLE FACTORY STANDARD

| Code Section | Service | Performance Standard |
|----------------|---------|---|
| I and VIII | Steam | No visible leakage for 15 seconds at 20% below nameplate set pressure or at 5 psig [0.35 barg] below nameplate set pressure, whichever is greater. |
| VIII | Air/Gas | No audible leakage for 15 seconds at 20% below nameplate set pressure or at 5 psig [0.35 barg] below name plate set pressure, whichever is greater. |
| I, IV and VIII | Liquid | No visible leakage for 30 seconds at 20% below nameplate set pressure or at 5 psig [0.35 barg] below name plate set pressure, whichever is greater. |
| IV | Steam | No visible leakage for 30 seconds at 12 psig [0.83 barg]. |

API-527 STANDARD

| Model | Code Section | Service | Performance Standard |
|--|--------------|---------|--|
| 300, 600 900, 6000 | I and VIII | Steam | API 527 - No visible leakage for 1 minute at 10% below nameplate set pressure or 5 psig [0.35 barg] below nameplate set pressure, whichever is greater. |
| 6000 (O-ring seat) 916/917 (soft seat) 918/919 (soft seat) | VIII | Air/Gas | API 527 - Bubble tight for 1 minute at 10% below nameplate set pressure or 5 psig [0.35 barg] below nameplate set pressure, whichever is greater. |
| 910/912 911/913 | VIII | Air/Gas | API 527 - D and E orifice: 40 bubbles/min, F through J orifice: 20 bubbles/min at 10% below nameplate set pressure or 5 psig [0.35 barg] below nameplate set pressure, whichever is greater. |
| 916/917 (soft seat) 918/919 (soft seat) | VIII | Liquid | API 527 - No leakage for 1 minute at 10% below nameplate set pressure, or 5 psig [0.35 barg] below nameplate set pressure, whichever is greater. |
| 910/912 911/913 928/929 | I and VIII | Liquid | API 527 - 10 cc/h for inlet sizes less than 1" or 10 cc/h/in of inlet valve size for inlet sizes 1" and larger at 10% below nameplate set pressure or 5 psig [0.35 barg] below nameplate set pressure, whichever is greater. |

KUNKLE SAFETY AND RELIEF PRODUCTS

DATA SUPPLEMENT

VALVE SELECTION GUIDE

(For specific minimum/maximum temperature/pressure ranges refer to individual product datasheets).

| Model(s) | Material | | Connections | | Inlet Size Range | | Min/Max ¹ Press. | | Min/Max Temp. | |
|---|----------|--------|-------------|------|------------------|-----------------|-----------------------------|--------------|---------------|------------|
| | Body | Trim | NPT | FLGD | in | [mm] | psig | [barg] | °F | [°C] |
| Steam (ASME Section I - Power Boilers) | | | | | | | | | | |
| 300, 600 | CS | SS | | X | 1¼ - 6" | [31.75 - 152.4] | 15/1000 | [1.0/69] | -20/800 | [-29/427] |
| 920, 921, 927 [special use - 10% blowdown] | CS | SS | X | O | ½ - 2" | [12.7 - 50.8] | 15/1400 | [1.0/96.5] | -20/800 | [-29/427] |
| 6010, 6021, 6121, 6182 6186, 6221, 6283 | Bronze | Brass | X | | ½ - 2½" | [12.7 - 63.5] | 3/250 | [0.69/17.2] | -60/406 | [-51/208] |
| 6030, 6130, 6230 | Bronze | SS | X | | ½ - 2½" | [12.7 - 63.5] | 3/300 | [0.69/20.7] | -60/425 | [-51/219] |
| 6252 | Iron | SS | X | X | 1½ - 6" | [38.1 - 152.4] | 10/250 | [0.69/17.2] | -20/406 | [-29/208] |
| Steam (ASME Section VIII - Unfired Steam Equipment) | | | | | | | | | | |
| 1 and 2 | Bronze | Brass | X | | ½ - 1" | [12.7 - 25.4] | 5/250 | [0.34/17.2] | -60/406 | [-51/208] |
| 264, 265 | CS | SS | X | | ½ - 1" | [12.7 - 25.4] | 4/3300 | [0.28/227.6] | -20/750 | [-29/399] |
| 266, 267 | SS | SS | X | | ½ - 1" | [12.7 - 25.4] | 4/3300 | [0.28/227.6] | -20/750 | [-29/399] |
| 300, 600 | CS | SS | | X | 1¼ - 6" | [31.75 - 152.4] | 15/1000 | [1.0/69] | -20/750 | [-29/399] |
| 910 | CS | SS | X | O | ½ - 2" | [12.7 - 50.8] | 3/1400 | [0.21/96.5] | -20/800 | [-29/427] |
| 911 | SS | SS | X | O | ½ - 2" | [12.7 - 50.8] | 3/1400 | [0.21/96.5] | -320/800 | [-195/427] |
| 912 | Bronze | Brass | X | | ½ - 2" | [12.7 - 50.8] | 3/250 | [0.21/17.2] | -320/406 | [-195/208] |
| 913 | Bronze | SS | X | O | ½ - 2" | [12.7 - 50.8] | 3/300 | [0.21/20.7] | -320/425 | [-195/219] |
| 6010, 6021, 6121, 6182, 6186, 6221, 6283 | Bronze | Brass | X | | ½ - 2½" | [12.7 - 63.5] | 3/250 | [0.21/17.2] | -60/406 | [-51/208] |
| 6030, 6130, 6230 | Bronze | SS | X | | ½ - 2½" | [12.7 - 63.5] | 3/300 | [0.21/20.7] | -60/425 | [-51/219] |
| 6252 | Iron | SS | X | X | 1½ - 6" | [38.1 - 152.4] | 10/250 | [0.69/17.2] | -20/406 | [-29/208] |
| Steam (ASME Section IV - Low Pressure Steam Heating Boilers) | | | | | | | | | | |
| 930 | Iron | Bronze | X | | 2 - 3" | [50.8 - 76.2] | 15 only | [1.0] | 250 only | [122] |
| 6933, 6934 | Bronze | Brass | X | | ½ - 2" | [12.7 - 50.8] | 15 only | [1.0] | 250 only | [122] |
| 6935 | Bronze | SS | X | | ½ - 2" | [12.7 - 50.8] | 15 only | [1.0] | 250 only | [122] |
| 6254 | Iron | SS | X | X | 1½ - 6" | [38.1 - 152.4] | 15 only | [1.0] | 250 only | [122] |
| Steam (Non-code)² | | | | | | | | | | |
| 40R, 40RL | SS | SS | X | | ½ - ¾" | [12.7 - 19.05] | 1/400 | [0.07/27.6] | -60/850 | [-51/454] |

X = Standard

O = Optional

NOTES

1. Set pressures less than 15 psig [1.0 barg] are non-code only.
2. See also ASME Section VIII steam valves for non-code steam applications.

KUNKLE SAFETY AND RELIEF PRODUCTS

DATA SUPPLEMENT

VALVE SELECTION GUIDE

(For specific minimum/maximum temperature/pressure ranges refer to individual product datasheets).

| Model(s) | Material | | Connections | | Inlet Size Range | | Min/Max ³ Press. | | Min/Max ⁴ Temp. | |
|--|----------|----------|----------------|------|------------------|-----------------|-----------------------------|--------------|----------------------------|------------|
| | Body | Trim | NPT | FLGD | in | [mm] | psig | [barg] | °F | [°C] |
| Air/Gas (ASME Section VIII) | | | | | | | | | | |
| 1 and 2 | Brass | Brass | X | | ½ - 1" | [12.7 - 25.4] | 5/250 | [0.34/17.2] | -60/406 | [-51/208] |
| 30 | Brass | Brass | X | | ¼" | [6.35] | 60/4000 | [4.1/275.8] | 20/300 | [-6.6/150] |
| 189 | Bronze | SS | X | | ½ - ¾" | [12.7 - 19.05] | 1000/2500 | [69/344.8] | -320/350 | [-195/177] |
| 264, 265 | CS | SS | X | | ½ - 1" | [12.7 - 25.4] | 4/3300 | [0.28/227.6] | -20/750 | [-29/399] |
| 266, 267 | SS | SS | X | | ½ - 1" | [12.7 - 25.4] | 4/3300 | [0.28/227.6] | -20/750 | [-29/399] |
| 300, 600 | CS | SS | | X | 1¼ - 6" | [31.75 - 152.4] | 15/1000 | [1.0/69] | -20/800 | [-195/427] |
| 330 ⁵ | Aluminum | SS | X ⁶ | | ¼ - ½" | [6.35 - 12.7] | 1000/5500 | [69/379.3] | -20/185 | [-29/85] |
| 330S, 333S ⁵ | Aluminum | SS | X ⁶ | | ¼ - ½" | [6.35 - 12.7] | 1000/7500 | [69/517.1] | -20/185 | [-29/85] |
| 337 | Iron | Bronze | X | | 2 - 3" | [50.8 - 76.2] | 1/60 | [0.07/4.14] | -20/406 | [-29/208] |
| 338 | Aluminum | Brass | X | | 2" | [50.8] | 5/30 | [0.3/2.07] | -30/400 | [-34/204] |
| 363 | Bronze | SS | X | | ½ - ¾" | [12.7 - 19.05] | 50/1000 | [3.4/69] | -320/350 | [-195/177] |
| 389 | SS | SS | X | | ½ - ¾" | [12.7 - 19.05] | 50/2500 | [3.4/172.4] | -320/350 | [-195/177] |
| 541 (Buna disc), 542 (Viton [®] disc), 548 (SS disc) | Brass | Brass | X | | ¼ - ½" | [6.35 - 12.7] | 3/400 | [0.21/27.6] | -20/400 | [-29/204] |
| 541 (Buna disc), 542 (Viton [®] disc) | SS | SS | X | | ¼ - ½" | [6.35 - 12.7] | 3/200 | [0.21/13.8] | -20/300 | [-29/149] |
| 910, 916 (soft seat) ⁴ | CS | SS | X | O | ½ - 2" | [12.7 - 50.8] | 3/1400 | [0.21/96.5] | -20/800 | [-29/427] |
| 911, 917 (soft seat) ⁴ | SS | SS | X | O | ½ - 2" | [12.7 - 50.8] | 3/1400 | [0.21/96.5] | -320/800 | [-195/427] |
| 912, 918 (soft seat) ⁴ | Bronze | Brass | X | | ½ - 2" | [12.7 - 50.8] | 3/300 | [0.21/20.7] | -320/406 | [-195/208] |
| 913, 919 (soft seat) ⁴ | Bronze | SS | X | O | ½ - 2" | [12.7 - 50.8] | 3/1400 | [0.21/96.5] | -320/425 | [-195/219] |
| 6010, 6121, 6182 6186, 6221, 6283 ¹ | Bronze | Brass | X | | ½ - 2½" | [12.7 - 63.5] | 3/250 | [0.21/17.2] | -60/406 | [-51/208] |
| 6030, 6130, 6320 | Bronze | SS | X | | ½ - 2½" | [12.7 - 63.5] | 3/300 | [0.21/20.7] | -60/425 | [-51/219] |
| 6252 | Iron | SS | X | X | 1½ - 6" | [38.1 - 152.4] | 10/250 | [0.69/17.2] | -20/406 | [-29/208] |
| Air/Gas² (Non-code) | | | | | | | | | | |
| 230 (Kynar [®] seat) | Aluminum | SS | X ⁶ | | ¼ - ½" | [6.35 - 12.7] | 300/1500 | [20.7/103.4] | -20/185 | [-29/85] |
| 803 (Kynar [®] seat) | Aluminum | SS | X | | ¼" | [6.35] | 1000/6000 | [69/413.8] | -20/185 | [-29/85] |
| 818 (Teflon [®] seat) | CS | SS/Brass | X | | 2" | [50.8] | 120/150 | [8.3/10.3] | -20/300 | [-29/150] |
| Air/Gas (Vacuum) in Hg [mm Hg] | | | | | | | | | | |
| 215V | Iron | Bronze | X | | 2 - 3" | [50.8 - 76.2] | 2/29 | [50/736] | -20/406 | [-29/208] |
| 910, 916 (soft seat) ⁴ | CS | SS | X | O | ½ - 2" | [12.7 - 50.8] | 6/29 | [152/736] | -20/800 | [-29/427] |
| 911, 917 (soft seat) ⁴ | SS | SS | X | O | ½ - 2" | [12.7 - 50.8] | 6/29 | [152/736] | -320/800 | [-195/427] |
| 912, 918 (soft seat) ⁴ | Bronze | Brass | X | | ½ - 2" | [12.7 - 50.8] | 6/29 | [152/736] | -320/406 | [-195/208] |
| 913, 919 (soft seat) ⁴ | Bronze | SS | X | O | ½ - 2" | [12.7 - 50.8] | 6/29 | [152/736] | -320/425 | [-195/219] |

X = Standard O = Optional

NOTES

- Soft seat available on some models.
- See also Section VIII air valves for non-code air/gas applications.
- Set pressures less than 15 psig [1.0 barg] are non-code only.
- Temperature limits of soft seats determine operating limits of valve.
- Kynar[®] or urethane seat.
- SAE inlet thread available
- Viton[®] and Teflon[®] are registered trademarks of the Chemours Company.
Kynar[®] is a registered trademark of Arkema Inc.

KUNKLE SAFETY AND RELIEF PRODUCTS

DATA SUPPLEMENT

VALVE SELECTION GUIDE

(For specific minimum/maximum temperature/pressure ranges refer to individual product datasheets).

| Model(s) | Material | | Connections | | Inlet Size Range | | Min/Max ¹ Press. | | Min/Max ² Temp. | |
|--|-------------|--------|-------------|------|------------------|-----------------|-----------------------------|--------------|----------------------------|------------|
| | Body | Trim | NPT | FLGD | in | [mm] | psig | [barg] | °F | [°C] |
| Liquid (ASME Section I) | | | | | | | | | | |
| 928, 929 | CS | SS | X | O | ½ - 2" | [12.7 - 50.8] | 15/1400 | [1.0/96.5] | -20/800 | [-29/427] |
| Liquid (ASME Section IV - Hot Water Boilers) | | | | | | | | | | |
| 537 (soft seat) | Iron/Bronze | Brass | X | | ¾ - 2" | [19.05 - 50.8] | 15/160 | [1.0/11] | -20/250 | [-29/121] |
| Liquid (ASME Section VIII) | | | | | | | | | | |
| 910, 916 (soft seat) ² | CS | SS | X | O | ½ - 2" | [12.7 - 50.8] | 3/1400 | [0.21/96.5] | -20/800 | [-29/427] |
| 911, 917 (soft seat) ² | SS | SS | X | O | ½ - 2" | [12.7 - 50.8] | 3/1400 | [0.21/96.5] | -320/800 | [-195/427] |
| 912, 918 (soft seat) ² | Bronze | Brass | X | | ½ - 2" | [12.7 - 50.8] | 3/300 | [0.21/20.7] | -320/406 | [-195/208] |
| 913, 919 (soft seat) ² | Bronze | SS | X | O | ½ - 2" | [12.7 - 50.8] | 3/1400 | [0.21/96.5] | -320/425 | [-195/219] |
| Liquid (Non-code) | | | | | | | | | | |
| 19, 20 | Bronze | Bronze | X | O | ½ - 3" | [12.7 - 76.2] | 1/300 | [0.07/20.7] | -60/406 | [-51/208] |
| 19M, 20M | Bronze | SS | X | O | 2½ - 3" | [63.5 - 76.2] | 1/500 | [0.07/34.5] | -60/406 | [-51/208] |
| 71S | Iron | SS | X | | ½ - 2" | [12.7 - 50.8] | 1/250 | [0.07/17.2] | -20/406 | [-29/208] |
| 171, 171P | CS | SS | X | | ½ - 2" | [12.7 - 50.8] | 1/400 | [0.07/27.6] | -20/550 | [-29/288] |
| 171S | SS | SS | X | | ½ - 2" | [12.7 - 50.8] | 1/400 | [0.07/27.6] | -20/550 | [-29/288] |
| 91 | Iron | Bronze | X | X | 1½ - 6" | [38.1 - 152.4] | 5/400 | [0.34/27.6] | -20/406 | [-29/208] |
| 218,228 | Iron | Bronze | X | X | 3, 4, and 6" | [76.2 - 152.4] | 60/200 | [4.1/13.8] | -20/406 | [-29/208] |
| 140 | SS | SS | X | | ⅜ - ½" | [9.5 - 12.7] | 10/300 | [0.69/20.7] | -60/406 | [-51/208] |
| 264, 265 | CS | SS | X | | ½ - 1" | [12.7 - 25.4] | 4/3300 | [0.28/227.6] | -20/750 | [-29/399] |
| 266, 267 | SS | SS | X | | ½ - 1" | [12.7 - 25.4] | 4/3300 | [0.28/227.6] | -20/750 | [-29/399] |
| 910, 916 (soft seat) ² | CS | SS | X | O | ½ - 2" | [12.7 - 50.8] | 3/1400 | [0.21/96.5] | -20/800 | [-29/427] |
| 911, 917 (soft seat) ² | SS | SS | X | O | ½ - 2" | [12.7 - 50.8] | 3/1400 | [0.21/96.5] | -320/800 | [-195/427] |
| 912, 918 (soft seat) ² | Bronze | Brass | X | | ½ - 2" | [12.7 - 50.8] | 3/300 | [0.21/20.7] | -320/406 | [-195/208] |
| 913, 919 (soft seat) ² | Bronze | SS | X | O | ½ - 2" | [12.7 - 50.8] | 3/1400 | [0.21/96.5] | -320/425 | [-195/219] |
| Liquid - Underwriters Laboratories (UL) For Oil Services | | | | | | | | | | |
| 200A | Bronze | Brass | X | | ¾ - 1½" | [19.05 - 38.1] | 1/200 | [0.07/13.8] | -60/406 | [-51/208] |
| 200H | Bronze | SS | X | O | ¾ - 2" | [19.05 - 50.8] | 1/200 | [0.07/13.8] | -60/406 | [-51/208] |
| Liquid - Underwriters Laboratories (UL) and Factory Mutual Research (FM) For Fire Pump Water Relief | | | | | | | | | | |
| 218, 228 | Iron | Bronze | X | X | 3, 4 and 6" | [76.2 - 152.4] | 60/200 | [4.1/13.8] | -20/406 | [-29/208] |
| 918 (soft seat) ^{2,3} | Bronze | Brass | X | | ¾ - 1" | [19.05 - 25.4] | 60/250 | [4.1/17.2] | -20/406 | [-29/208] |
| Other - Drip Pan Elbow | | | | | | | | | | |
| 299 | Iron | N/A | X | X | 2 - 8" | [50.80 - 203.2] | N/A | N/A | -20/406 | [-29/208] |

X = Standard O = Optional

NOTES

- Set pressures below 15 psig [1.0 barg] are non-code only.
- Temperature limits of soft seats determine operating limits of valve.
- FM Approved only.

KUNKLE SAFETY AND RELIEF PRODUCTS

DATA SUPPLEMENT

SIZING AND SELECTION

1. For Steam

- A. To obtain lb/h for sizing, divide BTU (max. firing rate) by 1000.
To obtain kg/h for sizing, divided KW by 0.6461.

2. For Liquid

- A. Liquid valves must be sized closely to actual flow; oversizing causes "chatter," undersizing causes high pressure.
B. Liquid relief valves are normally capacity rated at 25% overpressure. Refer to Catalog capacity correction tables for 10% overpressure. ASME Section I and VIII Liquid Valves are rated at 10% overpressure.

3. For Air-Gas

- A. Valves for cold or cryogenic temperatures (below -20°F [-29°C]) must be made from bronze, brass, or stainless steel to avoid the brittleness found in other materials at these temperatures. Many valves are offered with cryogenic materials as an option/extra.

SIZING – GAS FLOW CONVERSIONS

If flow is expressed in actual volume, such as CFM (cubic feet per minute) or ACFM (actual CFM) as is often done for compressors, where the flow is described as displacement or swept volume, the flow may be converted to SCFM as follows (or from flow expressed in m³/h to Nm³/h).

Conversions from one volumetric flow rate to another or to weight flow (and vice versa) may only be done when the volumetric flow is expressed in the standard conditions shown above. If flows are expressed at temperature or pressure bases that differ from those listed above, they must first be converted to the standard base.

Inch-Pound Units

$$\text{scfm} = \left(\frac{\text{cfm}}{\text{acfm}} \right) \times \frac{14.7 + p}{14.7} \times \frac{520}{460 + t}$$

Where:

p = gauge pressure of gas or vapor in psig
t = temperature of gas or vapor in °F

Metric Units

$$\text{Nm}^3/\text{h} = \text{m}^3/\text{h} = \left(\frac{\text{m}^3/\text{h}}{\text{m}^3/\text{h}} \right) \times \frac{1.013 + p}{1.013} \times \frac{273}{273 + t}$$

Where:

p = gauge pressure of gas or vapor in barg
t = temperature of gas or vapor in °C

CONVERSION FORMULAS

| Degrees Fahrenheit (°F) | Degrees Celsius (°C) |
|--------------------------------|---------------------------------|
| F + 459.67 = R (Rankine) | C + 273.15 = K (Kelvin) |
| (F - 32) x 0.556 = C (Celsius) | (C x 1.8) + 32 = F (Fahrenheit) |

KUNKLE SAFETY AND RELIEF PRODUCTS

DATA SUPPLEMENT

SIZING

AIR AND GAS TEMPERATURE CORRECTION FACTORS

| Temperature | | | Temperature | | | Temperature | | |
|-------------|-------|-------|-------------|-------|------|-------------|-------|------|
| °F | [°C] | Tc | °F | [°C] | Tc | °F | [°C] | Tc |
| 0 | [-18] | 1.062 | 140 | [60] | .931 | 380 | [193] | .787 |
| 10 | [-12] | 1.051 | 160 | [71] | .916 | 400 | [204] | .778 |
| 20 | [-7] | 1.041 | 180 | [82] | .902 | 420 | [216] | .769 |
| 30 | [-1] | 1.030 | 200 | [93] | .888 | 440 | [227] | .760 |
| 40 | [4] | 1.020 | 220 | [104] | .874 | 460 | [238] | .752 |
| 50 | [10] | 1.009 | 240 | [116] | .862 | 480 | [249] | .744 |
| 60 | [16] | 1.000 | 260 | [127] | .849 | 500 | [260] | .737 |
| 70 | [21] | .991 | 280 | [138] | .838 | 550 | [288] | .718 |
| 80 | [27] | .981 | 300 | [149] | .828 | 600 | [316] | .701 |
| 90 | [32] | .972 | 320 | [160] | .817 | 650 | [343] | .685 |
| 100 | [38] | .964 | 340 | [171] | .806 | 700 | [371] | .669 |
| 120 | [49] | .947 | 360 | [182] | .796 | 750 | [399] | .656 |

NOTE

1. For temperatures other than 60°F [15.6°C] at valve inlet, multiply SCFM by Tc.

PHYSICAL PROPERTIES

| Gas or Vapor | M | k | C |
|---------------------------------------|------------------|---------------------|--------------|
| | Molecular Weight | Specific Heat Ratio | Gas Constant |
| Air | 28.97 | 1.40 | 356 |
| Ammonia, Anhydrous | 17.03 | 1.31 | 348 |
| Butane-n (Normal Butane) | 58.12 | 1.09 | 326 |
| Carbon Dioxide | 44.01 | 1.29 | 346 |
| Carbon Monoxide | 28.01 | 1.40 | 356 |
| Dowtherm A | 165.00 | 1.05 | 321 |
| Dowtherm E | 147.00 | 1.00 | 315 |
| Ethane | 30.07 | 1.19 | 336 |
| Ethylene (Ethene) | 28.05 | 1.24 | 341 |
| Helium | 4.00 | 1.67 | 378 |
| Hydrogen | 2.02 | 1.41 | 357 |
| Methane | 16.04 | 1.31 | 348 |
| Natural Gas (specific gravity = 0.60) | 17.40 | 1.27 | 344 |
| Nitrogen | 28.01 | 1.40 | 356 |
| Octane | 114.23 | 1.05 | 321 |
| Oxygen | 32.00 | 1.40 | 356 |
| Propane | 44.10 | 1.13 | 330 |
| Steam | 18.02 | 1.31 | 348 |

KUNKLE SAFETY AND RELIEF PRODUCTS

DATA SUPPLEMENT

SIZING

For capacities of super heated steam, multiply saturated steam capacity by correction factor below.

STEAM SUPER HEAT CORRECTION FACTOR, K^s (continued on page 11)

| Set Pressure psig [barg] | | Saturated Steam Temp °F [°C] | | Steam Temperature in, °F [°C] | | | | | | | | | | |
|----------------------------------|--------|--------------------------------------|---------|-------------------------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| | | | | 340 [171] | 360 [182] | 380 [193] | 400 [204] | 420 [216] | 440 [227] | 460 [238] | 480 [249] | 500 [260] | 520 [271] | 540 [282] |
| 15 | [1.0] | 250 | [121.1] | 0.99 | 0.99 | 0.98 | 0.98 | 0.97 | 0.96 | 0.95 | 0.94 | 0.93 | 0.92 | 0.91 |
| 20 | [1.4] | 259 | [126.1] | 0.99 | 0.99 | 0.98 | 0.98 | 0.97 | 0.96 | 0.95 | 0.94 | 0.93 | 0.92 | 0.91 |
| 40 | [2.8] | 287 | [141.7] | 1.00 | 0.99 | 0.99 | 0.98 | 0.97 | 0.96 | 0.95 | 0.94 | 0.93 | 0.92 | 0.91 |
| 60 | [4.1] | 308 | [153.4] | 1.00 | 0.99 | 0.99 | 0.98 | 0.97 | 0.96 | 0.95 | 0.94 | 0.93 | 0.92 | 0.91 |
| 80 | [5.5] | 324 | [162.2] | 1.00 | 1.00 | 0.99 | 0.99 | 0.98 | 0.97 | 0.96 | 0.94 | 0.93 | 0.92 | 0.91 |
| 100 | [6.9] | 338 | [170.9] | | 1.00 | 1.00 | 0.99 | 0.98 | 0.97 | 0.96 | 0.95 | 0.94 | 0.93 | 0.92 |
| 120 | [8.2] | 350 | [177.0] | | 1.00 | 1.00 | 0.99 | 0.98 | 0.97 | 0.96 | 0.95 | 0.94 | 0.93 | 0.92 |
| 140 | [9.6] | 361 | [182.6] | | | 1.00 | 1.00 | 0.99 | 0.98 | 0.96 | 0.95 | 0.94 | 0.93 | 0.92 |
| 160 | [11.0] | 371 | [188.6] | | | | 1.00 | 0.99 | 0.98 | 0.97 | 0.95 | 0.94 | 0.93 | 0.92 |
| 180 | [12.8] | 380 | [193.0] | | | | 1.00 | 0.99 | 0.98 | 0.97 | 0.96 | 0.95 | 0.93 | 0.92 |
| 200 | [13.7] | 388 | [198.0] | | | | 1.00 | 0.99 | 0.99 | 0.97 | 0.96 | 0.95 | 0.93 | 0.92 |
| 220 | [15.1] | 395 | [201.0] | | | | 1.00 | 1.00 | 0.99 | 0.98 | 0.96 | 0.95 | 0.94 | 0.93 |
| 240 | [16.5] | 403 | [205.7] | | | | | 1.00 | 0.99 | 0.98 | 0.97 | 0.95 | 0.94 | 0.93 |
| 260 | [17.9] | 409 | [209.4] | | | | | 1.00 | 0.99 | 0.98 | 0.97 | 0.96 | 0.94 | 0.93 |
| 280 | [19.2] | 416 | [213.3] | | | | | 1.00 | 1.00 | 0.99 | 0.97 | 0.96 | 0.95 | 0.93 |
| 300 | [20.6] | 422 | [217.0] | | | | | | 1.00 | 0.99 | 0.98 | 0.96 | 0.95 | 0.93 |
| 350 | [24.1] | 436 | [224.3] | | | | | | 1.00 | 1.00 | 0.99 | 0.97 | 0.96 | 0.94 |
| 400 | [27.5] | 448 | [231.0] | | | | | | | 1.00 | 0.99 | 0.98 | 0.96 | 0.95 |
| 450 | [31.0] | 460 | [238.0] | | | | | | | | 1.00 | 0.99 | 0.97 | 0.96 |
| 500 | [34.4] | 470 | [243.0] | | | | | | | | 1.00 | 0.99 | 0.98 | 0.96 |
| 550 | [37.9] | 480 | [249.0] | | | | | | | | | 1.00 | 0.99 | 0.97 |
| 600 | [41.3] | 489 | [253.4] | | | | | | | | | 1.00 | 0.99 | 0.98 |
| 650 | [44.8] | 497 | [258.0] | | | | | | | | | | 1.00 | 0.99 |
| 700 | [48.2] | 506 | [263.3] | | | | | | | | | | 1.00 | 0.99 |
| 750 | [51.7] | 513 | [267.7] | | | | | | | | | | 1.00 | 1.00 |
| 800 | [55.2] | 520 | [271.3] | | | | | | | | | | | 1.00 |
| 850 | [58.6] | 527 | [275.0] | | | | | | | | | | | 1.00 |
| 900 | [62.1] | 533 | [278.4] | | | | | | | | | | | 1.00 |
| 950 | [65.5] | 540 | [282.2] | | | | | | | | | | | |
| 1000 | [69.0] | 546 | [285.6] | | | | | | | | | | | |

KUNKLE SAFETY AND RELIEF PRODUCTS

DATA SUPPLEMENT

SIZING

For capacities of super heated steam, multiply saturated steam capacity by correction factor below.

STEAM SUPER HEAT CORRECTION FACTOR, K^s

| Set Pressure | | Saturated Steam Temp | | Steam Temperature in, °F [°C] | | | | | | | | | | |
|--------------|--------|----------------------|---------|-------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | | | | 560 | 580 | 600 | 620 | 640 | 660 | 680 | 700 | 720 | 740 | 760 |
| psig | [barg] | °F | [°C] | [293] | [304] | [316] | [327] | [338] | [349] | [360] | [371] | [382] | [393] | [404] |
| 15 | [1.0] | 250 | [121.1] | 0.90 | 0.89 | 0.88 | 0.87 | 0.86 | 0.86 | 0.85 | 0.84 | 0.83 | 0.83 | 0.82 |
| 20 | [1.4] | 259 | [126.1] | 0.90 | 0.89 | 0.88 | 0.87 | 0.86 | 0.86 | 0.85 | 0.84 | 0.83 | 0.83 | 0.82 |
| 40 | [2.8] | 287 | [141.7] | 0.90 | 0.89 | 0.88 | 0.87 | 0.87 | 0.86 | 0.85 | 0.84 | 0.84 | 0.83 | 0.82 |
| 60 | [4.1] | 308 | [153.4] | 0.90 | 0.89 | 0.88 | 0.87 | 0.87 | 0.86 | 0.85 | 0.84 | 0.84 | 0.83 | 0.82 |
| 80 | [5.5] | 324 | [162.2] | 0.90 | 0.89 | 0.89 | 0.88 | 0.87 | 0.86 | 0.85 | 0.84 | 0.84 | 0.83 | 0.82 |
| 100 | [6.9] | 338 | [170.9] | 0.91 | 0.90 | 0.89 | 0.88 | 0.87 | 0.86 | 0.85 | 0.85 | 0.84 | 0.83 | 0.82 |
| 120 | [8.2] | 350 | [177.0] | 0.91 | 0.90 | 0.89 | 0.88 | 0.87 | 0.86 | 0.85 | 0.85 | 0.84 | 0.83 | 0.82 |
| 140 | [9.6] | 361 | [182.6] | 0.91 | 0.90 | 0.89 | 0.88 | 0.87 | 0.86 | 0.85 | 0.85 | 0.84 | 0.83 | 0.82 |
| 160 | [11.0] | 371 | [188.6] | 0.91 | 0.90 | 0.89 | 0.88 | 0.87 | 0.86 | 0.86 | 0.85 | 0.84 | 0.83 | 0.82 |
| 180 | [12.8] | 380 | [193.0] | 0.91 | 0.90 | 0.89 | 0.88 | 0.87 | 0.86 | 0.86 | 0.85 | 0.84 | 0.83 | 0.82 |
| 200 | [13.7] | 388 | [198.0] | 0.91 | 0.90 | 0.89 | 0.88 | 0.87 | 0.86 | 0.86 | 0.85 | 0.84 | 0.83 | 0.83 |
| 220 | [15.1] | 395 | [201.0] | 0.92 | 0.91 | 0.90 | 0.89 | 0.88 | 0.87 | 0.86 | 0.85 | 0.84 | 0.84 | 0.83 |
| 240 | [16.5] | 403 | [205.7] | 0.92 | 0.91 | 0.90 | 0.89 | 0.88 | 0.87 | 0.86 | 0.85 | 0.84 | 0.84 | 0.83 |
| 260 | [17.9] | 409 | [209.4] | 0.92 | 0.91 | 0.90 | 0.89 | 0.88 | 0.87 | 0.86 | 0.85 | 0.85 | 0.84 | 0.83 |
| 280 | [19.2] | 416 | [213.3] | 0.92 | 0.91 | 0.90 | 0.89 | 0.88 | 0.87 | 0.86 | 0.85 | 0.85 | 0.84 | 0.83 |
| 300 | [20.6] | 422 | [217.0] | 0.92 | 0.91 | 0.90 | 0.89 | 0.88 | 0.87 | 0.86 | 0.86 | 0.85 | 0.84 | 0.83 |
| 350 | [24.1] | 436 | [224.3] | 0.93 | 0.92 | 0.91 | 0.90 | 0.89 | 0.88 | 0.87 | 0.86 | 0.85 | 0.84 | 0.83 |
| 400 | [27.5] | 448 | [231.0] | 0.93 | 0.92 | 0.91 | 0.90 | 0.89 | 0.88 | 0.87 | 0.86 | 0.85 | 0.84 | 0.84 |
| 450 | [31.0] | 460 | [238.0] | 0.94 | 0.93 | 0.92 | 0.91 | 0.89 | 0.88 | 0.87 | 0.86 | 0.86 | 0.85 | 0.84 |
| 500 | [34.4] | 470 | [243.0] | 0.94 | 0.93 | 0.92 | 0.91 | 0.90 | 0.89 | 0.88 | 0.87 | 0.86 | 0.85 | 0.84 |
| 550 | [37.9] | 480 | [249.0] | 0.95 | 0.94 | 0.92 | 0.91 | 0.90 | 0.89 | 0.88 | 0.87 | 0.86 | 0.85 | 0.84 |
| 600 | [41.3] | 489 | [253.4] | 0.96 | 0.94 | 0.93 | 0.92 | 0.90 | 0.89 | 0.88 | 0.87 | 0.86 | 0.85 | 0.84 |
| 650 | [44.8] | 497 | [258.0] | 0.97 | 0.95 | 0.94 | 0.92 | 0.91 | 0.90 | 0.89 | 0.87 | 0.86 | 0.86 | 0.85 |
| 700 | [48.2] | 506 | [263.3] | 0.97 | 0.96 | 0.94 | 0.93 | 0.91 | 0.90 | 0.89 | 0.88 | 0.87 | 0.86 | 0.85 |
| 750 | [51.7] | 513 | [267.7] | 0.98 | 0.96 | 0.95 | 0.93 | 0.92 | 0.90 | 0.89 | 0.88 | 0.87 | 0.86 | 0.85 |
| 800 | [55.2] | 520 | [271.3] | 0.99 | 0.97 | 0.95 | 0.94 | 0.92 | 0.91 | 0.90 | 0.88 | 0.87 | 0.86 | 0.85 |
| 850 | [58.6] | 527 | [275.0] | 0.99 | 0.98 | 0.96 | 0.94 | 0.93 | 0.92 | 0.90 | 0.89 | 0.88 | 0.87 | 0.86 |
| 900 | [62.1] | 533 | [278.4] | 1.00 | 0.99 | 0.97 | 0.95 | 0.93 | 0.92 | 0.90 | 0.89 | 0.88 | 0.87 | 0.86 |
| 950 | [65.5] | 540 | [282.2] | 1.00 | 0.99 | 0.97 | 0.95 | 0.94 | 0.92 | 0.91 | 0.89 | 0.88 | 0.87 | 0.86 |
| 1000 | [69.0] | 546 | [285.6] | 1.00 | 0.99 | 0.98 | 0.96 | 0.94 | 0.93 | 0.91 | 0.90 | 0.89 | 0.87 | 0.86 |

KUNKLE SAFETY AND RELIEF PRODUCTS

DATA SUPPLEMENT

GENERAL INFORMATION

Definition of units

| | |
|--------------------|---|
| GPM | -Gallons per minute (liquid flow) |
| SCFM | -Standard cubic feet per minute (air or gas flow) |
| #/h | -Pounds per hour (steam flow) |
| Nm ³ /h | -Normal cubic meter per hour |
| BHP | -Horsepower (energy) |
| K _v | -Flow coefficient |
| F | -° Fahrenheit (temperature) |
| C | -° Centigrade (temperature) |
| Hg | -Inches of mercury (pressure) |
| psig | -Pounds per square inch, gauge (pressure) |
| psia | -Pounds per square inch, absolute (pressure) |
| barg | -(pressure) bar, gauge |

DEFINITIONS AND COMMONLY USED TERMS

Blowdown

The difference in pressure between the opening pressure and reclose pressure. May be expressed in percent of set pressure or 'psig'.

Drag

Occurs when a valve does not close completely after popping and remains partly open until the pressure is further reduced.

Lift

The distance between the seat and disc seating surfaces when the valve is open.

MAWP

Maximum allowable working pressure. This data is found on the pressure vessel nameplate and is the maximum pressure at which the lowest set safety valve must be set (stamped).

Operating pressure

The gauge pressure at which a pressure vessel is maintained in normal operation.

Overpressure

The permitted increase in pressure developed after the valve has opened.

Pre-open/warn

An audible or visual discharge at a pressure slightly lower than the set pressure. Warns the operator that the valve is about to cycle.

Set pressure

The gauge pressure at which a safety valve visibly and audibly opens or a setting at which a relief valve discharges a 1" long, unbroken stream of liquid.

Safety and relief valves

The terms 'safety valve' and 'relief valve' are frequently used interchangeably. This is satisfactory to the extent that both safety and relief valves of the spring-loaded model are similar in external appearance and both serve the broad general purpose of limiting media (liquid and gaseous) pressures by discharging some of the pressurized liquid or gas. Some authorities restrict 'safety valves' to those installed on boilers, superheaters, and fired vessels - all others being classified as relief valves. We prefer, however, to briefly define them as follows:

- Safety valves are used with gases - which include air and steam. Their design always includes a huddling chamber which utilizes the expansion forces of these gases to effect quick opening (popping) and closing actions. The difference between the opening and closing pressures is termed 'blowdown' and for steam safety valves blowdown limitations are defined in the ASME Power Boiler Code.
- Relief valves are normally used for liquid service, although safety valves may also be used. Ordinarily, relief valves do not have an accentuated huddling chamber or a regulator ring for varying or adjusting blowdown. Therefore, they operate with more of a modulating action as pressure increases or decreases.

Safety relief valve pointers

1. ASME Codes require that valves for air, steam and water service over 140°F [60°C] have test levers.
2. Steam safety valves may be used for air service but not vice versa. Liquid valves should be used on liquid only.
3. Safety relief valves should be installed vertically with the drain holes open or piped to a convenient location.
4. The inlet to and outlet from a safety relief valve must be at least as large as the inlet and outlet connections of the pressure relief valve.

Maintenance

1. Develop a regular program of visual inspection, looking for clogged drains and discharge pipe, dirt build-up in and around the valve seat and broken or missing parts or seals.
2. Test the valve every six to 12 months (depending on plant's age and condition) preferably by raising the system pressure to the valve's set pressure or operating the hand lever. Always wear proper PPE (gloves, hearing protection, etc.) when performing lift lever test. Ensure all open discharge holes are facing away from you. Note: Minimum of 75% of set required before using lever to test.
3. Do not paint, oil, or otherwise cover any interior or working parts of any safety valve. They do not require any lubrication or protective coating to work properly.

When safety/relief valves require repair, service adjustments, or set pressure changes, work shall be accomplished by the manufacturer, or holders of 'VR' stamp.

Neither Emerson, Emerson Automation Solutions, nor any of their affiliated entities assumes responsibility for the selection, use or maintenance of any product. Responsibility for proper selection, use, and maintenance of any product remains solely with the purchaser and end user.

Kunkle Valve is a mark owned by one of the companies in the Emerson Automation Solutions business unit of Emerson Electric Co. Emerson Automation Solutions, Emerson and the Emerson logo are trademarks and service marks of Emerson Electric Co. All other marks are the property of their respective owners.

The contents of this publication are presented for informational purposes only, and while every effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, express or implied, regarding the products or services described herein or their use or applicability. All sales are governed by our terms and conditions, which are available upon request. We reserve the right to modify or improve the designs or specifications of such products at any time without notice.