


Steam Trap

TDC-1F

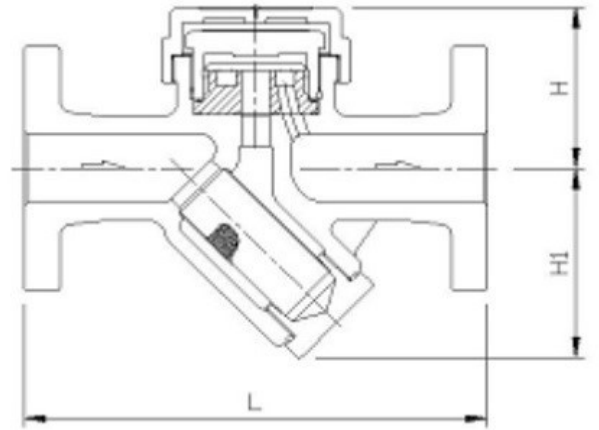

- Convenience in elimination of air binding and maintenance.
- A high-hardness heat-treated stainless steel disk and seat are used for excellent durability, and the improved structure of a seat prevents a body from erosion and exerts the excellent operability.
- Malfunction is prevented from the foreign substances by using a built-in strainer.

Working Pressure	Max. 16 kgf/cm ²
	Min. 0.35 kgf/cm ²
Working Temperature	Max. 220°C
Connection	JIS B 2210 FLANGE
Materials	BODY: Ductile Iron
	Trim: Stainless Steel

MODEL	SIZE	D	L	H1	H
TDC-1F	15A	15	136	60	52
	20A	20	140	60	52
	25A	25	150	62	52
	32A	32	190	95	70
	40A	40	260	112	94
	50A	50	260	112	94