


## Asbestos Gasket Jointing Sheet Without Wire

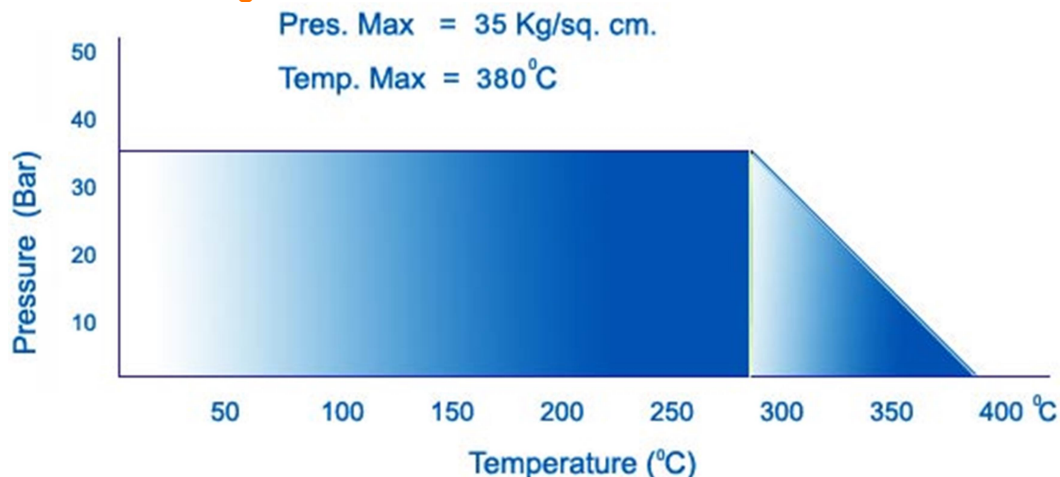


### Material Composition:

Made from Chrysotile Asbestos Fiber, Natural Rubber

### Applications:

To Seal off Water, Steam, Air & Alkaline Chemicals for low stress conditions

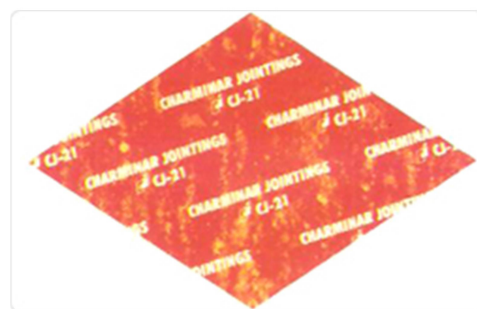

<b>MATERIAL TYPE</b>	:	COMPRESSED ASBESTOS FIBER (CAF)
<b>THICKNESS</b>	:	0.25, 0.5mm, 0.8mm, 1mm, 1.5mm, 2mm, 3mm, 4mm, 5mm, 6mm (OTHER THICKNESS ON REQUEST)
<b>SURFACE FINISH</b>	:	Red, Grey, Graphited (OTHER COLORS ON REQUEST)
<b>DIMENSIONS OF SHEETS</b>	:	1500MM X 3100MM, 1500MM X 1500MM, 1500MM X 1000MM, 1500MM X 2000MM, 1270MM X 1270MM, 1270MM X 3810MM, 3000MM X 3000MM
<b>OPERATING CONDITION</b>	:	Maximum pressure : 35 Bar Maximum Temperature: 380°C
<b>SPECIFICATION COMPLIANCE</b>	:	IS: 2712 / 1998 GRADE W / 3

The following Information Applies to material Thickness 1.5mm.

S.NO.	Typical Properties	Test Method	Unit	Specified Value
1	DENSITY	IS:2712/1998	G/cm3	1.70 - 2.20
2	TENSILE STRENGTH	IS:2712/1998	Mpa	>6.7
3	COMPRESSIBILITY IS:2712/1998	IS:2712/1998	%	6 -14
4	RECOVERY	IS:2712/1998	%	>40
5	FLEXIBILITY	IS:2712/1998	-	No Visual
6	IGNITION LOSS	IS:2712/1998	%	<28

### NOTE

All information and recommendations given in this brochure are correct to the best of our knowledge. However, in view of the wide variety of possible installation and operating conditions one cannot draw the final conclusion in all application cases regarding the behaviour in a gasket joint. Therefore, information can only serve as a guideline.