






Spring return (Type FAS)

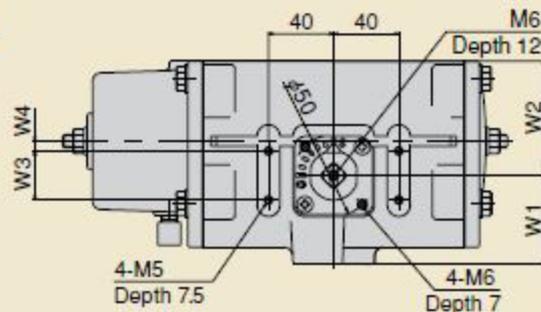


Type FAS-6

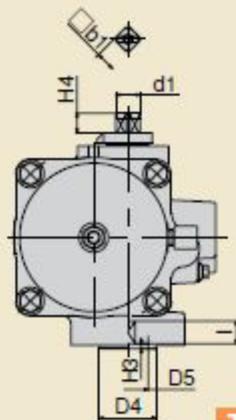


Type FAS

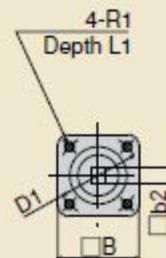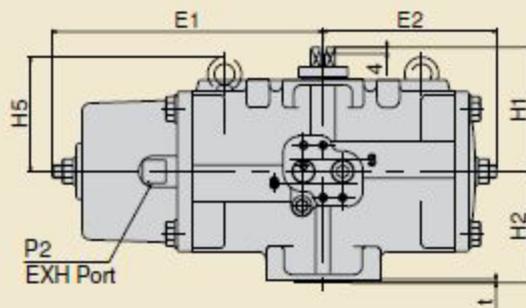

Type FAS-1

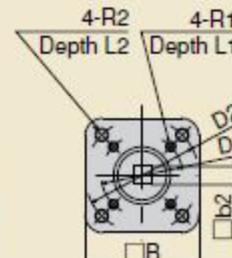

Type FAS-2,3

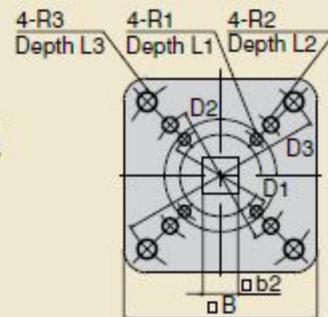

Type FAS-4,5,6

unit:mm

Type	E1	E2	W1	W2	W3	W4	H1	H2	H3	H4	H5	D1	D2	D3	D4	D5	d1	b1	b2	B	ℓ	t	R1×L1	R2×L2	R3×L3	P1	P2	Weight (kg)
FAS-1	132	87	50	54	30	0	70	55	3	12	—	50	—	—	35	25	15	12	9	50	16	2	M6×9	—	—	Rc $\frac{1}{4}$	Rc $\frac{1}{8}$	2.1
FAS-2	166	107	54	70	30	6	80	68	3	12	—	50	70	—	35	30	15	12	11	70	16	2	M6×9	M8×12	—	Rc $\frac{1}{4}$	Rc $\frac{1}{8}$	3.8
FAS-3	203	128	57	87	30	13	86	78	3	12	—	50	70	—	35	32	21	17	13	70	25	2	M6×9	M8×12	—	Rc $\frac{1}{4}$	Rc $\frac{1}{8}$	6.4
FAS-4	290	160	68	111	30	21	108	96	4	12	—	50	70	102	55	40	21	17	17	95	27	3	M6×9	M8×12	M10×15	Rc $\frac{1}{4}$	Rc $\frac{1}{8}$	12.8
FAS-5	363	208	78	135	30	30	132	116	5	20	—	70	102	125	55	50	29	23	27	113	34	3	M8×12	M10×15	M12×18	Rc $\frac{1}{4}$	Rc $\frac{1}{8}$	23.4
FAS-6	483	268	101	178	30	45	152	125	5	20	160	70	102	125	70	60	41	32	27	134	34	3	M8×12	M10×15	M12×18	Rc $\frac{1}{4}$	Rc $\frac{1}{8}$	50.0