


Hydrant Reducing Valve

HRP-F

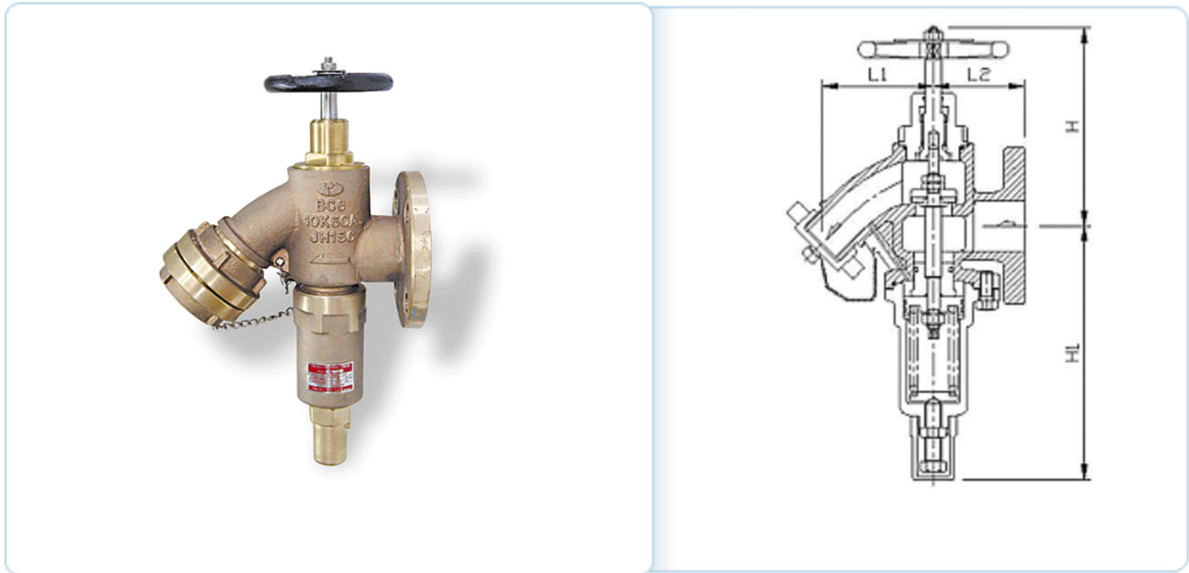

An automatic adjustment valve for reducing and maintaining the pressure of fluid highly pressurized by a pump at a primary side.

Inlet Pressure	14kgf/cm ² or lower
Outlet Pressure	5~7kgf/cm ²
Working Temperature	Max 80℃
Working Fluid	Water, Sea Water
Connection	INLET : JIS B 2210 FLANGE OUTLET: JIS B 0203 PIPE THREAD
Valve Type	PISTON TYPE
Materials	Body: Cast Bronze
	Trim: Stainless Steel, Monel
	Disc: Teplon
	Coupling: Cast Bronze

MODEL	SIZE	L1	L2	H1	H2
HRP-F	40A	115	90	195	225
	50A	115	90	195	230
	65A	135	100	210	240