


## CJ-28 IT 'O'

For stress conditions. For transmission and hydraulic fluids, Steam, Alkalies, anti freeze, refrigerating oil, anti corrosion mixtures.

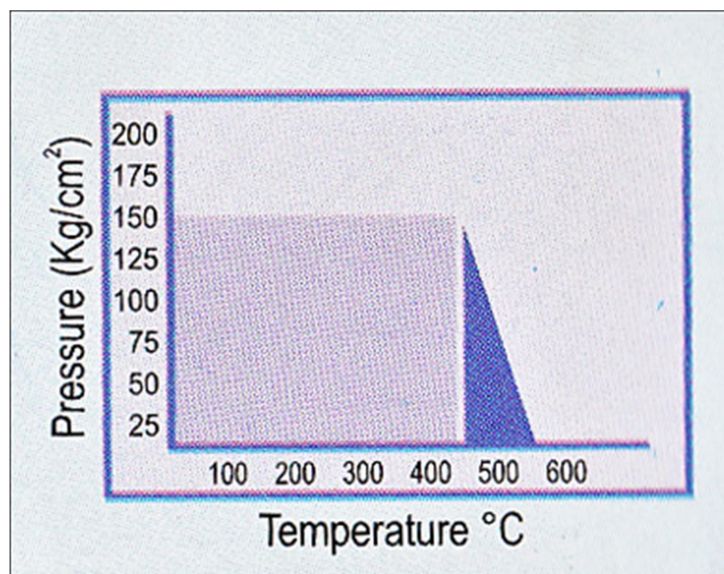

### Specification Compliance

DIN : 3754 IT 'O'



Density g / cm <sup>3</sup>	:	1.8-2.0
Tensile Strength kg / gm <sup>2</sup>	:	150.0
Compressibility %	:	5-15
Recovery %	:	40.0
Stress Relaxation N /mm <sup>2</sup>	:	30.0
Ignition Loss %	:	26.0
Fluid Absorption	:	-----
Water		
Mass Increase %	:	-----
In ASTM Oil No. 3		
Thickness Increase %	:	15
Mass Increase %	:	20
In Fuel B		
Thickness Increase %	:	15
Mass Increase %	:	15
Sulphuric Acid (65%)		
Thickness Increase %	:	-----
Max Operating Conditions		
Max Operating Temperature °C	:	550
Max Operating Pressure kg/cm <sup>3</sup>	:	140