


Hydrant Reducing Valve

HRG-F

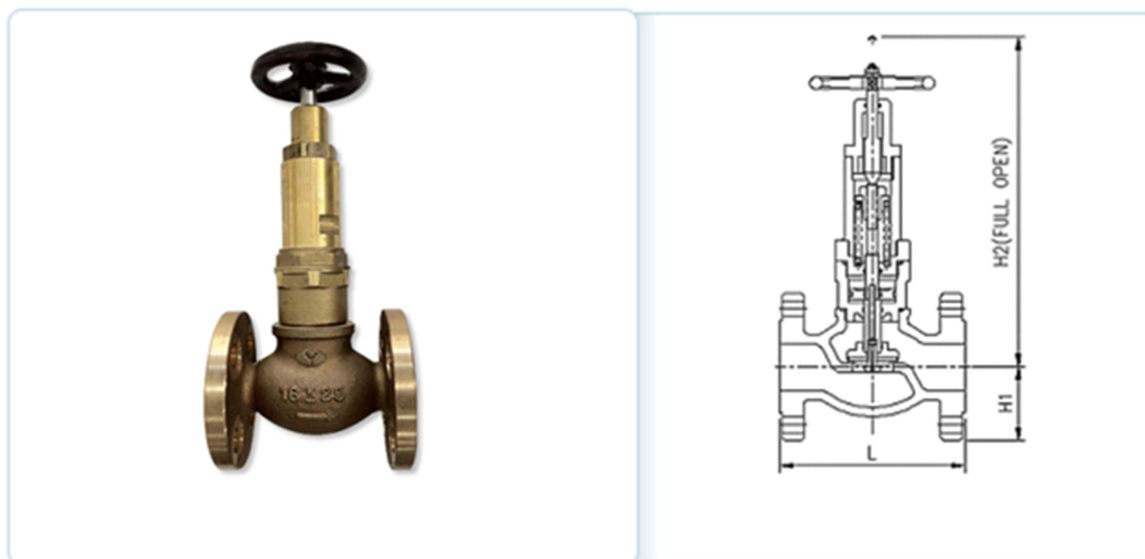

An automatic adjustment valve for reducing and maintaining the pressure of fluid highly pressurized by a pump at a primary side.

Inlet Pressure	14kgf/cm ² or lower
Outlet Pressure	5~7kgf/cm ²
Working Temperature	Max 80℃
Working Fluid	Water, Sea Water
Connection	INLET : JIS B 2210 FLANGE
	OUTLET: JIS B 0203 PIPE THREAD
	OUTLET: JIS B 2210 FLANGE
Valve Type	Globe Type
Materials	Body: Cast Bronze
	Trim: Stainless Steel, Monel
	Disc: Teplon
	Coupling: Cast Bronze

MODEL	SIZE	L	H2
HRG-F	25A	140	286
	40A	180	286