


Steam Trap

TBP-1S

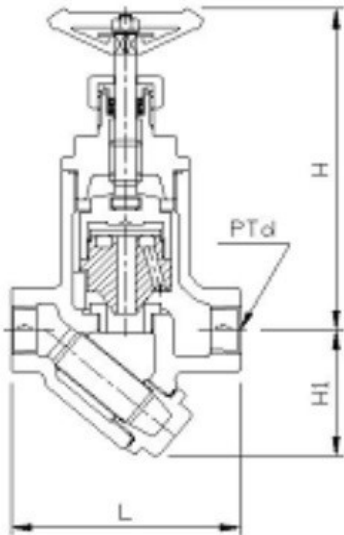

- As a bypass line is not required, the cost and space for setup is reduced or not bounded.
- Malfunction is prevented from the foreign substances by using a built-in strainer.
- Functions of a bypass valve and a steam trap are switched by simply manipulating a handle.

Working Pressure	Max. 16 kgf/cm2
	Min. 0.35 kgf/cm2
Working Temperature	Max. 220°C
Connection	JIS B 0203 PIPE TAPER THREAD
Materials	BODY: Ductile Iron
	Trim: Stainless Steel

MODEL	SIZE	D	L	H1	H
TBP-1S	15A	PT 1/2"	100	58	150
	20A	PT 3/4"	100	58	150
	25A	PT 1"	110	60	150